




GESINT[®]
WWW.GESINTSRL.IT

ELECTRODE LEVEL PROBE FOR CONDUCTIVE LIQUID WITH FIXED IMMERSION

SLFN Series

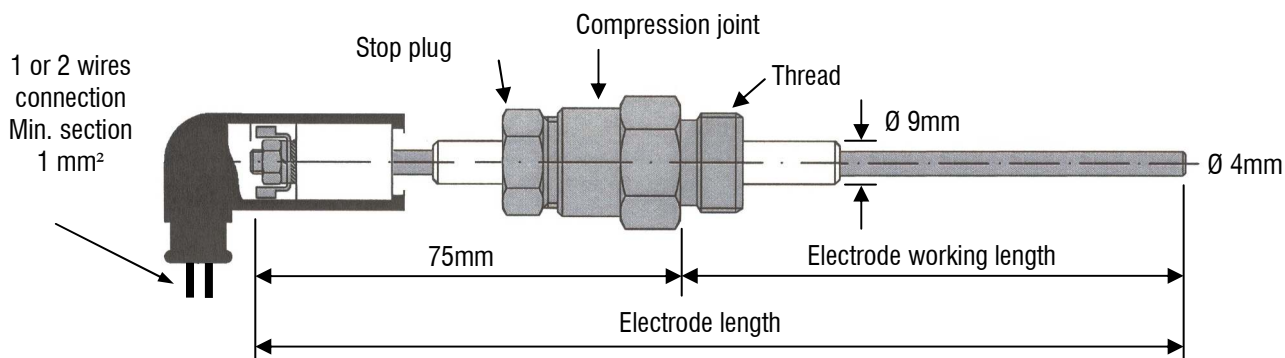

TECHNICAL DATA

MATERIAL

Electrode: Ø4mm, AISI 316L (ASTM A479, Last version)

Terminal cover: EPDM

Joint: AISI 316L (ASTM A479, Last version)

Insulation bush: PTFE

Electrode length: 114 - 175 - 500 - 1000 mm

PROCESS CONNECTION:

- 1/2" BSP male - SW22

- 3/8" BSP male - SW22

- 1/4" BSP male - SW22

WORK ENVIRONMENT

Max Working temperature: 160°C

Max Working pressure: 10 bar

WARNING: IN ORDER TO OBTAIN A PERFECT SEAL, INSULATION BUSH ARE SUPPLIED PRELOADED; PLEASE AVOID ANY TAMPERING OF COMPRESSION JOINT. IN CASE OF LEAKAGE LOCK THE COMPRESSION JOINT USING THE STOP PLUG.