




GESINT[®]
WWW.GESINTSRL.IT

ELECTRODE LEVEL PROBE FOR CONDUCTIVE LIQUID WITH ADJUSTABLE IMMERSION

SLR Series

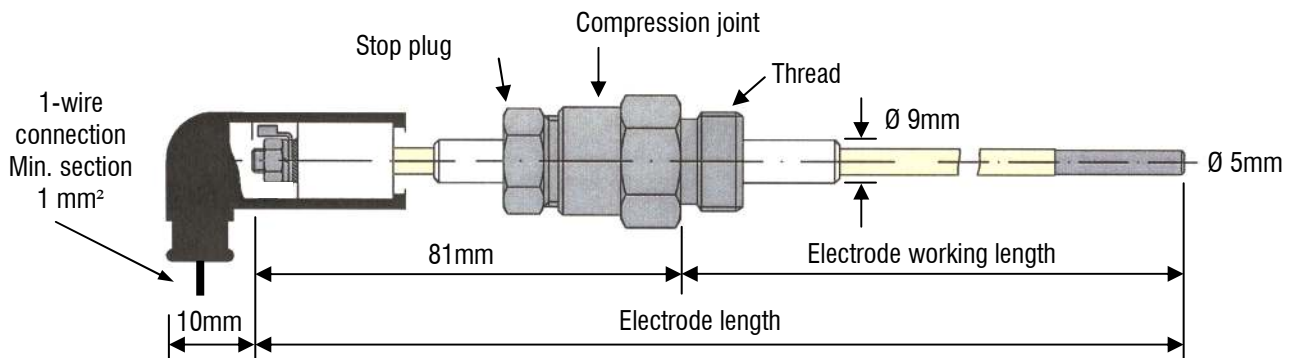

TECHNICAL DATA

MATERIAL

Electrode:	AISI 316 L (ASTM A479, Last version)
Terminal cover:	EPDM
Joint:	AISI 316 L (ASTM A479, Last version)
Insulation bush:	PTFE
O-ring seal:	NBR

Coating:	Irradiated polyvinylidene fluoride shrink sheath
	- Dielectric strength: 30 KV/mm
	- Volume resistivity: 10 ¹³ Ω/cm.min.
	- Flameproof: MIL-I-23053
	- Water absorption: 0.5% max
	- Resistance to persistent agent: MIL-I-23053
	- Specification: MIL-I-23053/8
	UL 224/VW - 1 150°C 600 V
	UTE C 93641 mod. GER 55

Electrode length: 290 - 500 - 750 - 1000 mm

INSTALLATION ATTACHMENT:

- 1/2" BSP male - SW22
- 3/8" BSP male - SW22
- 1/4" BSP male - SW22

WORK ENVIRONMENT

Max Working temperature:	98°C
Max Working pressure:	0,4 bar

WARNING: PROBE MUST BE INSTALLED IN STANDING POSITION; THE LIQUID TO BE MEASURED MUST NOT REACH THE COMPRESSION JOINT AS IT DOES NOT GUARANTEE A GOOD SEAL. AFTER INSTALLATION, LOCK THE COMPRESSION JOINT USING THE STOP PLUG.